



Bone Conduction Headphones

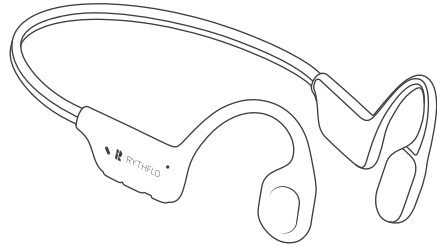


USER MANUAL RY-BC01

WHAT'S INCLUDED

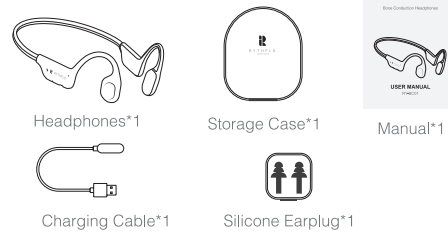

PRODUCT DIAGRAM



- ① Magnetic charging / Data Transmission Port
- ② Light Bar
- ③ Power / Multi-Function Button
- ④ Volume Up / Next Track
- ⑤ Volume Down / Previous Track
- ⑥ Indicator Light

OPERATION

Button	Function	Operation
⏻	Power On	Press and hold for 3s
	Power Off	Press and hold for 5s
	Play/Pause	Press once
	Light On/Off	Press twice
	MP3 Mode/Bluetooth Mode	Press three times
	Activate Voice Assistant	Press and hold for 2s
	Answer/Hang up Call	Press once when call come in
	Reject Call	Press and hold for 2s when call come in
	➕	Next Track
Volume Up		Press once
➖	Previous Track	Press and hold for 2s
	Volume Down	Press once
⏪ & ⏩	Bluetooth Repairing	Press and hold for 6s when connected
⏪ & ⏻	Reset	Press and hold for 6s

INDICATOR LIGHT


Status	Light Indicator	Display
Power On	Blue	Flashes once
Connected		Flashes once every 5s
Reconnection		Flashes twice every 5s
Fully Charged		Solid
Power Off	Red	Flashes once
Charging		Solid
Low Battery		Flashes once every 5mins
Reset		Flashes 2s
Pairing	Red / Blue	Flashing alternately

SPECIFICATION

Product Material	ABS + PC + Titanium Alloy
Bluetooth Version	5.3
Working Frequency Range	2.402-2.480GHZ
Battery Capacity	140mAh
Rated Input	5V = 140mA
Charging Time	2H
Play Time	8H(70%Volume)
Protection Grade	IP67

CONNECTION

Search Bluetooth "RY-BC01" to connect, the LED indicator light turn off when connected.




TIPS


- * The LED Indicator light flashes red and blue alternately when pairing.
- * When power on for the first time, RY-BC01 automatically enters pairing mode.
- * The pairing state will exit if the pairing lasts longer than 3mins and the pairing fails.
- * When powered on, RY-BC01 automatically connect with the last paired device.

CHARGING

If the smart device displays or the headphones remind low battery, please use the provided magnetic charging cable to charge.



Magnetic Charging Cable




USB Adapter
(not included)

* Please make sure the charging port is clean and dry before charging.

AUDIO STORAGE (FOR MP3 MODE)

STEP 1

Connected to the computer through provided magnetic charging cable.

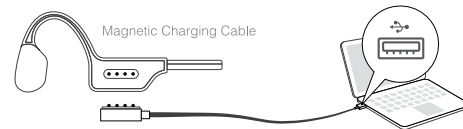

STEP 2

Open the folder named RY-BC01.



STEP 3

Put the downloaded audio files from computer to RY-BC01 folder.



MANUFACTURER

Shenzhen Hanke Technology Co.,Ltd
Meipeng SKY311, No.3 Hebei Industrial Zone, Zhongxing Road
Ma'antang Community, Bantian Street, Longgang District,Shenzhen,
Guangdong, China, 518000

FCC COMPLIANCE

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to

which the receiver is connected.
-- Consult the dealer or an experienced radio/TV technician for help.

This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.

Radiation Exposure Statement
The device has been evaluated to meet general RF exposure requirement in portable exposure condition without restriction.



Made in China

WARRANTY&SERVICE

This product is covered with Rythflo product and labor warranty for 12 months from the date of its original purchase. Any concerns please email us as soon as possible, Rythflo will help you within 24 hours.

support@rythflo.com

